




# 无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

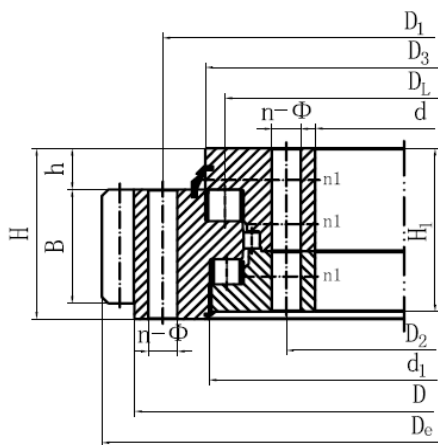

JB/T2300-1999

131 serie

132 serie

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Outer teeth DL mm	D mm	d mm	H mm	D1 mm	D2 mm	n	Φ mm	n1	D3 mm	d1 mm	H1 mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
1	131.25.500	634	366	148	598	402	24	18	4	537	526	138	32	80	5	664	130	50	67	200
	6														664.8	108	60	80	200	
2	131.25.560	694	426	148	658	462	24	18	4	597	586	138	32	80	5	724	142	50	67	224
	6														724.8	118	60	80	224	
3	131.25.630	764	496	148	728	532	28	18	4	667	656	138	32	80	6	808.8	132	60	80	262
	8														86.4	98	80	110	257	
4	131.25.710	844	576	148	808	612	28	18	4	747	736	138	32	80	6	886.8	145	60	80	295
	8														886.4	108	80	110	291	
5	131.32.800	964	636	182	920	680	36	22	4	841	830	172	40	120	8	1006.4	123	121	167	490
	10														1008	98	151	209	487	
6	131.32.900	1064	736	182	1020	780	36	22	4	941	930	172	40	120	8	1102.4	135	121	167	549
	10														1108	108	151	209	562	
7	131.32.1000	1164	836	182	1120	880	40	22	5	1041	1030	172	40	120	10	1218	119	151	209	631
	12														1221.6	99	181	251	631	



Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Outer teeth D <sub>L</sub> mm	D mm	d mm	H mm	D <sub>1</sub> mm	D <sub>2</sub> mm	n	Φ mm	n <sub>1</sub>	D <sub>3</sub> mm	d <sub>1</sub> mm	H <sub>1</sub> mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
8	131.32.1120	1284	956	182	1240	1000	40	22	5	1161	1150	172	40	120	10	1338	131	151	209	710
	12														1341.6	109	181	251	710	
9	131.40.1250	1445	1055	220	1393	1107	45	26	5	1300	1287	210	50	150	12	1509.6	123	229	314	1137
	14														1509.2	105	263	366	1126	
10	131.40.1400	1595	1205	220	1543	1257	45	26	5	1450	1437	210	50	150	12	1665.6	136	229	314	1299
	14														1663.2	116	263	366	1281	
11	131.40.1600	1795	1405	220	1743	1457	48	26	6	1650	1637	210	50	150	14	1873.2	131	263	366	1501
	16														1868.8	114	302	417	1471	
12	131.40.1800	1995	1605	220	1943	1657	48	26	6	1850	1837	210	50	150	14	2069.2	145	263	366	1682
	16														2076.8	127	302	417	1697	
13	131.45.2000	2221	1779	231	2155	1845	60	33	6	2055	2033	219	54	160	16	2300.8	141	322	445	2147
	18														2300.4	125	362	501	2129	
14	131.45.2240	2461	2019	231	2395	2085	60	33	6	2295	2273	219	54	160	16	2556.8	157	322	445	2501
	18														2552.4	139	362	501	2461	
15	131.45.2500	2721	2279	231	2655	2345	72	33	8	2555	2533	219	54	160	18	2822.4	154	362	501	2786
	20														2816	138	402	556	2731	
16	131.45.2800	3021	2579	231	2955	2645	72	33	8	2855	2833	219	54	160	18	3110.4	170	362	501	3067
	20														3116	153	402	556	3079	
17	131.50.3150	3432	2868	270	3342	2958	72	45	8	3213	3196	258	65	180	20	3536	174	452	626	5025
	22														3537.6	158	498	689	5009	
18	131.50.3550	3832	3268	270	3742	3358	72	45	8	3613	3596	258	65	180	20	3936	194	452	626	5713
	22														3933.6	176	498	689	5661	
19	131.50.4000	4282	3718	270	4192	3808	80	45	8	4063	4046	258	65	180	22	4395.6	197	498	689	6508
	25														4395	173	565	783	6449	
20	131.50.4500	4782	4218	270	4692	4308	80	45	8	4563	4546	258	65	180	22	4901.6	220	498	689	7438
	25														4895	193	565	783	7308	